

DYNESS

PowerBrick SC

16.08 kWh~803.8 kWh Capacity
Residential Low-voltage Battery


NEW



Fast Charge/Discharge:
200 A (10.24 kW)




Floor-mounted,
wall-mounted installations



Easy to move by
1 person with
wheels (optional)



314Ah LFP cells
8000+ cycles



Wide Operating Temperature Range

-20°C
(optional)


55°C



Ultra Safe

Built-in aerosol fire extinguisher to eliminate fire risks

5s

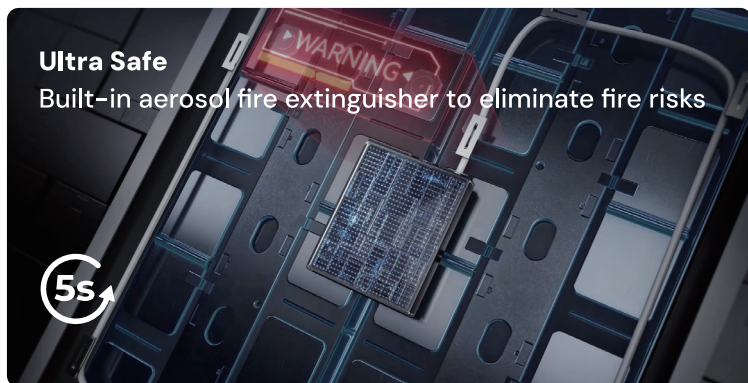

Smart Monitoring & Management
Display screen+APP+Web



SPECIFICATION

Model	PowerBrick SC
Battery Type	LiFePO ₄ (LFP)
Nominal Battery Energy	16.08 kWh
Usable Battery Energy	15.28 kWh
Nominal Capacity	314 Ah
Nominal Voltage	51.2 V
Operating Voltage	44.8 V~57.6 V
Recommended Charge & Discharge C Rate	0.45C (140 A)
Max. Charge C Rate	0.64C (200 A)
Max. Discharge C Rate	0.64C (200 A)
Peak Discharge Current (25°C)	300A, 2min
Recommended Charge & Discharge Power	7.168 kW
Max. Charge Power	10.24 kW
Max. Discharge Power	10.24 kW
Depth of Discharge (DOD)	95%
Charge Temp. Range	0°C~55°C/-20°C~55°C (optional)
Discharge Temp. Range	-20°C~55°C
Net Weight	116 kg
Dimension[W/D/H]	435/233/857 mm
Protection Level	IP20
Communication	CAN/RS485
Cycle Life ^[1]	≥8000 Cycles
User Interface	WiFi+APP
Safety Protection	Built-in aerosol fire extinguisher
Installation	Floor-mounted, Wall-mounted
Regulating Wheel (4pcs)	1 kg, 80/80/80 mm (optional)
Top Cover	2 kg, 435/233/60 mm (optional)
Expansion	Up to 50 units in parallel
Warranty Period ^[2]	10 Years
Certification & Safety Standard	UN38.3/IEC62619
Compatible Inverters	SMA/Victron Energy/Ingeteam/Solis/GoodWe/ Growatt/Solplanet/Luxpower/DEYE/Sungrow etc.

[1] Test conditions: 0.2C Charging & Discharging, 25°C, 95% DOD, 70%EOL

[2] Refer to Dyness Warranty Letter

